

FLEX-SEAL™ Skirting System

Solves Spillage and Dust Control Problems

Flex-Seal™ Skirting System is a dynamic containment unit that fully seals the loading zone. It stops material spillage leaks, controls dust emissions and helps prevent other resulting problems such as belt damage. Conventional skirt clamps and systems may contain spillage of materials, but maintenance is typically difficult and time-consuming. And more importantly, the damage done to the conveyor belt is costly. The Flex-Seal Skirting System creates a parallel seal with the belt to be effective for your operation.



Quick adjustment by using the locking wedges on the clamp pins


Anti-vibration pin ensures pin remains locked



Comes in easy-to-use 4' (1.2M) lengths

Skirting thickness can vary from 5/16" to 3/4" (8-19mm)

Angles the skirting so it seals with low contact pressure and without damaging the belt

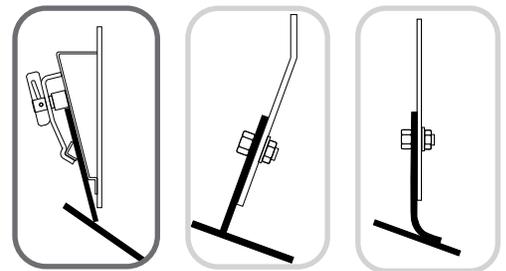

No hassle installation with few parts and complete step-by-step instructions

Features and Benefits

- **No belt damage.** With correct installation, the skirting will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe service access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Seal™ Skirting Systems are made of corrosion-protected components for tough duty. Replacement parts are available.

FLEX-SEAL™ Skirting System

Ordering Information

Flex-Seal™ Skirt System*		
Description	Ordering Number	Item Code
Flex-Seal™ Skirt System	RMC2-FS	76558

* Includes angle plate, one Bolt-On PAL PAK, and one 4' (1.2M) Clamp Bar.
Skirt board and skirting not included.
Skirting Thickness Ranges: 5/16" to 3/4" (8mm to 19mm)

Replacement Parts*		
Description	Ordering Number	Item Code
Angle Plate	RMC2-AP	76559
Bolt-On PAL PAK*	RMC1-BPP	76415
Clamp Bar	RMC1-CB	75820

*Includes two bolt-on clamp pins and two clamp plates.

Specifications	
Skirting Width and Thickness Range	
Width Required	6" (150mm)
Thickness Range	5/16"-3/4" (8-19mm)



Flex-Seal™



Bolt-On PAL PAK


Additional Information

Check out our other Skirting Systems, like the RMC1 or Flex-Lok™, as well as Flexco's Standard or Dual Seal Polyurethane Skirting.

RMC1



Flex-Lok™

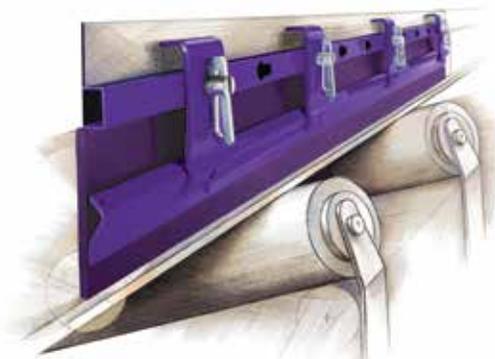

Flexco Polyurethane Skirting



Authorized Distributor:

 2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 12/01/22. For reorder: X2538



FLEX-LOK™ Skirting System

Quickly and Easily Eliminate Load Point Spillage


The Flex-Lok™ Skirt Clamp is designed with versatility to meet the needs of any conveyor loading site—even severe, heavy loading applications. The exclusive design features a unique clamp pin with a captive wedge that can be locked in any position 360° around the pin. When properly installed, Flex-Lok ensures the skirting will not rub on the belt and cause premature wear or gouging marks.



Optional limited space Mini Flex-Lok clamps available



Anti-vibration pin ensures pin remains locked

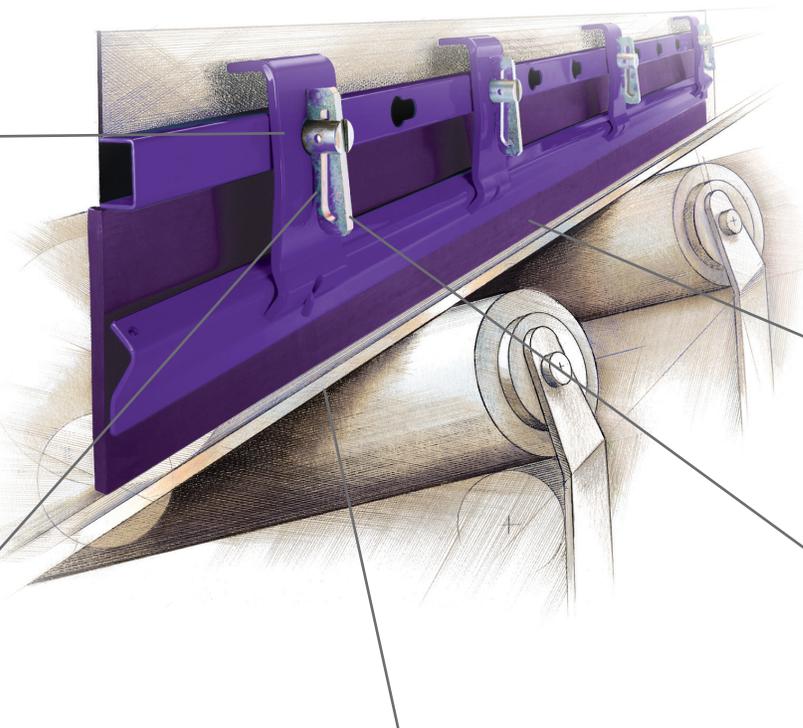

No hassle installation because skirting restraining bar is held in place by clamp plates

Quick adjustment using the locking wedges on the clamp pins

Skirting thickness can vary from 5/16" to 1" (8-25mm) on Standard and 5/16" to 5/8" (8-16mm) on Mini

Features and Benefits

- **No belt damage.** With correct installation, the skirting will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe surface access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Lok Skirt Clamps are made of corrosion-protected components for tough duty. Replacement parts are available.


FLEX-LOK™ Skirting System

Ordering Information

Flex-Lok™ Skirt Clamp*		
Description	Ordering Number	Item Code
Skirt Clamp	FLSC-I	71052
Replacement Parts		
Clamp Runner - 6ft. (1.8M)	FL-RPI	71058
Clamp Plate	FL-PC-I	71057
Clamp Pin	FL-CP-I	71141
Restraining Bar - 6ft. (1.8M)	FL-RBI	71060

* Skirting Thickness Range: 5/16" to 1" (8-25mm)

Shaded items are made to order.
Lead time: 5 working days




Standard

Mini Flex-Lok™ Skirt Clamp*		
Description	Ordering Number	Item Code
Mini Skirt Clamp	FLSCM-I	71055
Replacement Parts		
Clamp Runner - 6ft. (1.8M)	FL-RPI	71058
Mini Clamp Plate	FLM-PC	71140
Clamp Pin	FL-CP-I	71141
Restraining Bar - 6ft. (1.8M)	FL-RBI	71060

* Skirting Thickness Range: 5/16" to 5/8" (8-16mm)


Shaded items are made to order.
Lead time: 5 working days



Mini

Stainless Steel Flex-Lok™ Skirt Clamp		
Description	Ordering Number	Item Code
SS Skirt Clamp	FLSC-ISS	75778
Replacement Parts		
SS Clamp Plate	FL-PC-ISS	71168
Clamp Pin	FL-CP-ISS	71164

316 Stainless on all parts

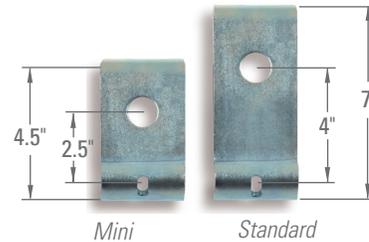

Mini

Standard

Additional Information

Check out our other Skirting Systems, like the RMC1 or Flex-Lok™, as well as Flexco's Standard or Dual Seal Polyurethane Skirting.

RMC1



Flex-Seal



Flexco Polyurethane Skirting



HEAD OFFICE

Western Australia

Local Call: 1300 127 091

International Call: +61 (0) 8 9270 8555

Email: wasales@transmin.com.au

Address: 33-37 Denninup Way Malaga
Perth, Western Australia, 6090

www.transmin.com.au



2525 Wisconsin Avenue • Downers Grove, IL 60515-4200 • USA
Tel: (630) 971-0150 • Fax: (630) 971-1180 • E-mail: info@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2022 Flexible Steel Lacing Company. 12/06/22. For reorder: X2540

