


# P-TYPE® Secondary Belt Cleaner

## Reliable Secondary Belt Cleaner

The Flexco P-Type® Secondary Belt Cleaner is compact and designed to be positioned just off the head pulley to remove carryback from the belt. Stand alone, or when used in conjunction with a precleaner, the P-Type cleaner is a reliable choice for maintaining a highly efficient cleaning system.

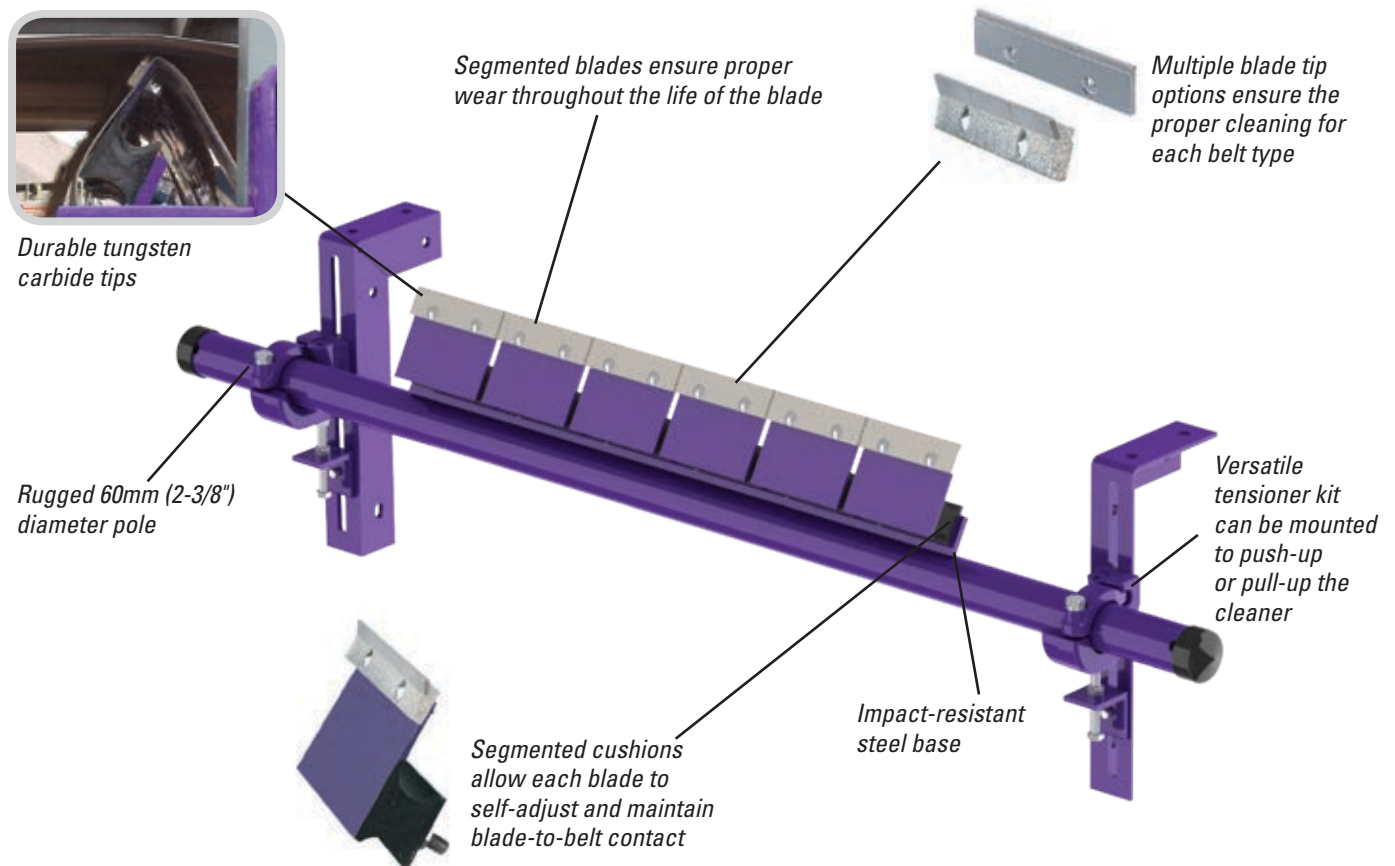

### Features and Benefits

- **Cleaning efficiency of metal blades.** The thin, hard edges of the metal blades deliver high cleaning efficiency and long wear life.
- **Works with Flexco mechanical splices.** The C-Tip tungsten carbide blades are impact-resistant, and the spring cushion allows them to move away from a passing splice without damage and with minimal cleaning disruption. V-Tip can be used only on vulcanized belts.
- **A complete cleaning system.** When the P-Type is teamed with a primary cleaner the system provides maximum cleaning power for tough applications.
- **Fits most conveyor structures.** Available for belt widths from 450 mm to 1800 mm (18" to 72").

# P-TYPE® Secondary Belt Cleaner

## Specifications and Guidelines

### Maximum Belt Speed

5 m/s (1000 FPM)

### Temperature Rating

-35° C to 82° C (-30° F to 180° F)

### Usable Blade Wear Length


9 mm (3/8")

### Blade Material

Impact resistant, long-lasting tungsten carbide (C-Tip for mechanical fasteners, V-Tips for vulcanized belts)

### Available for Belt Widths

450 to 1800mm (18" to 72")

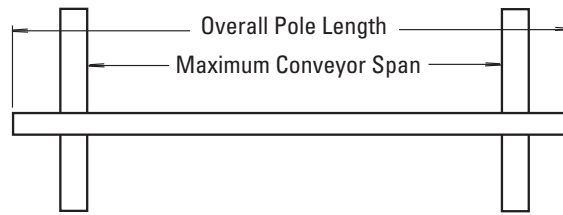


### Pole Length

Cleaner size up to 1200mm (48") + 750mm (30") / Cleaner size 1350mm (54") and up + 850mm (34")

### Maximum Conveyor Span

Cleaner size up to 1200mm (48") + 625mm (25") / Cleaner size 1350mm (54") and up + 725mm (29")



### Horizontal Clearance Required

100mm (4")

### Vertical Clearance Required

200mm (8")

## Ordering Information

### P-Type® Secondary with C-Tips\*

Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV450-S/S	75323
600	24	PV600-S/S	75324
750	30	PV750-S/S	75325
900	36	PV900-S/S	75326
1050	42	PV1050-S/S	75327
1200	48	PV1200-S/S	75328
1350	54	PV1400-S/S	75329
1500	60	PV1500-S/S	75330
1800	72	PVHD1800-S/S	A1603

\*NOTE: C-Tips can be used on mechanically spliced and vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

### P-Type® Secondary with V-Tips\*

Belt Width		Ordering Number	Item Code
mm	in.		
450	18	PV450	73435
600	24	PV600	73004
750	30	PV750	73006
900	36	PV900	73008
1050	42	PV1050	73010
1200	48	PV1200	73012
1350	54	PV1400	73436
1500	60	PV1500	73437
1800	72	PVHD1800	74598

\*NOTE: V-Tips can be used ONLY on vulcanized belts. P-Type cleaners come standard with Select Set™ Tensioners.

### Replacement Tips

Ordering Number	Item Code
ICT6	74535
PSA150	73156

Lead time: 1 working day

### Tips Required per Cleaner Size

mm	450	600	750	900	1050	1200	1350	1500	1800
in.	18	24	30	36	42	48	54	60	72
C-Tips or V-Tips Required	3	4	5	6	7	8	9	10	12

## Additional Information

For size restricted applications, see the P-Type LS (Limited Space) Sell Sheet X2479.



**TRANSMIN**  
www.transmin.com.au

T: +61 (8) 9270 8555  
E: sales@transmin.com.au

Flexco (Aust.) Pty. Ltd • 10 Solent Circuit • Baulkham Hills NSW 2153 • Australia  
Tel: 612-8818-2000 • Fax: 612-8824-6333 • E-mail: salesau@flexco.com

Visit [www.flexco.com](http://www.flexco.com) for other Flexco locations and products.  
©2018 Flexible Steel Lacing Company. 03/19/18. For reorder: X3887

